




SAE Through Hard Washer

SAE高强度垫圈

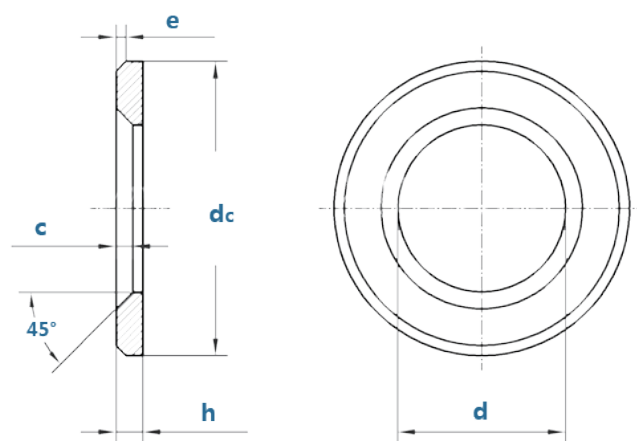

Size	d		dc		h		per 1000 units
	Min	Max	min	max	min	max	kg
6	3.84	4.17	9.4	9.91	0.91	1.65	0.66
8	4.65	4.98	11	11.51	0.91	1.65	0.88
10	5.44	5.77	12.57	13.08	0.91	1.65	1.12
12	6.22	6.73	14.15	14.66	1.3	2.03	1.81
1/4	7.01	7.52	15.75	16.26	1.3	2.03	2.21
5/16	8.61	9.12	17.3	17.86	1.3	2.03	2.51
3/8	10.19	10.64	20.45	21.01	1.3	2.03	3.46
7/16	11.79	12.29	23.24	23.8	1.3	2.03	4.39
1/2	13.36	13.87	26.8	27.74	1.88	3.07	9.02
9/16	14.96	15.47	29.18	30.12	1.88	3.07	10.44
5/8	16.48	17.42	33.15	34.09	2.74	3.71	17.7
3/4	20.45	21.39	37.13	38.07	3.1	4.5	24.15
7/8	23.65	24.59	44.27	45.21	3.45	4.5	36.39
1	26.8	27.74	50.62	51.56	3.45	4.5	47.56
1-1/8	31.57	32.51	56.97	57.91	3.71	4.5	59.61
1-1/4	34.75	35.69	63.32	64.26	3.45	4.5	71.62
1-1/2	41.1	42.04	76.02	76.96	3.45	4.5	103.77
1-3/4	47.45	48.39	85.55	86.49	4.52	5.11	155.17
2	53.8	54.74	95.2	96.01	4.52	5.11	187.68