




Retaining rings for bores DIN472

孔用挡圈DIN472

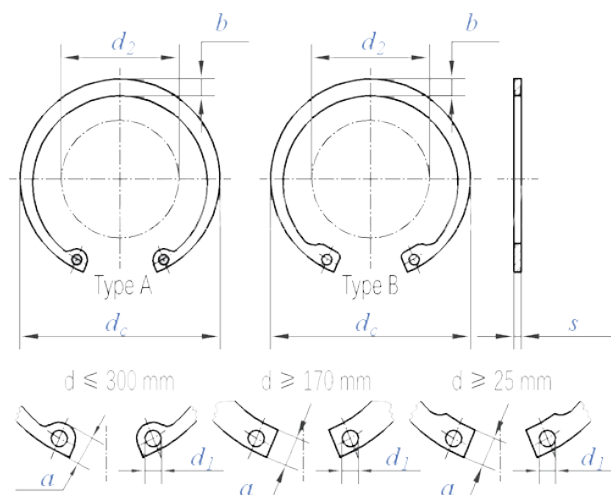

Size	s		dc			a	b	d1	d2	weight
Metric	max	min	baisc	max	min	max	≈	min	d2	kg
8	0.8	0.75	8.7	9.06	8.6	2.4	1.1	1	3	0.14
9	0.8	0.75	9.8	10.16	9.7	2.5	1.3	1	3.7	0.15
10	1	0.94	10.8	11.16	10.7	3.2	1.4	1.2	3.3	0.18
11	1	0.94	11.8	12.16	11.7	3.3	1.5	1.2	4.1	0.31
12	1	0.94	13	13.36	12.9	3.4	1.7	1.5	4.9	0.37
13	1	0.94	14.1	14.46	14	3.6	1.8	1.5	5.4	0.42
14	1	0.94	15.1	15.46	15	3.7	1.9	1.7	6.2	0.52
15	1	0.94	16.2	16.56	16.1	3.7	2	1.7	7.2	0.56
16	1	0.94	17.3	17.66	17.2	3.8	2	1.7	8	0.6
17	1	0.94	18.3	18.72	18.17	3.9	2.1	1.7	8.8	0.65
18	1	0.94	19.5	19.92	19.37	4.1	2.2	2	9.4	0.74
19	1	0.94	20.5	20.92	20.37	4.1	2.2	2	10.4	0.83
20	1	0.94	21.5	21.92	21.37	4.2	2.3	2	11.2	0.9
21	1	0.94	22.5	22.92	22.37	4.2	2.4	2	12.2	1
22	1	0.94	23.5	23.92	23.37	4.2	2.5	2	13.2	1.1
24	1.2	1.14	25.9	26.32	25.69	4.4	2.6	2	14.8	1.42
25	1.2	1.14	26.9	27.32	26.69	4.5	2.7	2	15.5	1.5
26	1.2	1.14	27.9	28.32	27.69	4.7	2.8	2	16.1	1.6
28	1.2	1.14	30.1	30.6	29.85	4.8	2.9	2	17.9	1.8
30	1.2	1.14	32.1	32.6	31.85	4.8	3	2	19.9	2.06
31	1.2	1.14	33.4	33.9	33.15	5.2	3.2	2.5	20	2.1
32	1.2	1.14	34.4	34.9	34.15	5.4	3.2	2.5	20.6	2.21
34	1.5	1.44	36.5	37	36.25	5.4	3.3	2.5	22.6	3.2
35	1.5	1.44	37.8	38.3	37.55	5.4	3.4	2.5	23.6	3.54
36	1.5	1.44	38.8	39.3	38.55	5.4	3.5	2.5	24.6	3.7
37	1.5	1.44	39.8	40.3	39.55	5.5	3.6	2.5	25.4	3.74
38	1.5	1.44	40.8	41.3	40.55	5.5	3.7	2.5	26.4	3.9
40	1.75	1.69	43.5	44.4	43.11	5.8	3.9	2.5	27.8	4.7
42	1.75	1.69	45.5	46.4	45.11	5.9	4.1	2.5	29.6	5.4
45	1.75	1.69	48.5	49.4	48.11	6.2	4.3	2.5	32	6
47	1.75	1.69	50.5	51.6	50.04	6.4	4.4	2.5	33.5	6.1
48	1.75	1.69	51.5	52.6	51.04	6.4	4.5	2.5	34.5	6.7
50	2	1.93	54.2	55.3	53.74	6.5	4.6	2.5	36.3	7.3
52	2	1.93	56.2	57.3	55.74	6.7	4.7	2.5	37.9	8.2
55	2	1.93	59.2	60.3	58.74	6.8	5	2.5	40.7	8.3
56	2	1.93	60.2	61.3	59.74	6.8	5.1	2.5	41.7	8.7
58	2	1.93	62.2	63.3	61.74	6.9	5.2	2.5	43.5	10.5

60	2	1.93	64.2	65.3	63.74	7.3	5.4	2.5	44.7	11.1
62	2	1.93	66.2	67.3	65.74	7.3	5.5	2.5	46.7	11.2
63	2	1.93	67.2	68.3	66.74	7.3	5.6	2.5	47.7	12.4
65	2.5	2.43	69.2	70.3	68.74	7.6	5.8	3	49	14.3
68	2.5	2.43	72.5	73.6	72.04	7.8	6.1	3	51.6	16
70	2.5	2.43	74.5	75.6	74.04	7.8	6.2	3	53.6	16.5
72	2.5	2.43	76.5	77.6	76.04	7.8	6.4	3	55.6	18.1
75	2.5	2.43	79.5	80.6	79.04	7.8	6.6	3	58.6	18.8
78	2.5	2.43	82.5	83.8	81.96	8.5	6.8	3	60.1	20.4
80	2.5	2.43	85.5	86.8	84.96	8.5	7	3	62.1	22
82	2.5	2.43	87.5	88.8	86.96	8.5	7	3	64.1	24
85	3	2.92	90.5	91.8	89.96	8.6	7.2	3.5	66.9	25.3
88	3	2.92	93.5	94.8	92.96	8.6	7.4	3.5	69.9	28
90	3	2.92	95.5	96.8	94.96	8.6	7.6	3.5	71.9	31
92	3	2.92	97.5	98.8	96.96	8.7	7.8	3.5	73.7	32
95	3	2.92	100.5	101.8	99.96	8.8	8.1	3.5	76.5	35
98	3	2.92	103.5	104.8	102.96	9	8.3	3.5	79	37
100	3	2.92	105.5	106.8	104.96	9.2	8.4	3.5	80.6	38
102	4	3.9	108	109.3	107.46	9.5	8.5	3.5	82	55
105	4	3.9	112	113.3	111.46	9.5	8.7	3.5	85	56
108	4	3.9	115	116.3	114.46	9.5	8.9	3.5	88	60
110	4	3.9	117	118.3	116.46	10.4	9	3.5	88.2	64.5
112	4	3.9	119	120.3	118.46	10.5	9.1	3.5	90	72
115	4	3.9	122	123.5	121.37	10.5	9.3	3.5	93	74.5
120	4	3.9	127	128.5	126.37	11	9.7	3.5	96.9	77
125	4	3.9	132	133.5	131.37	11	10	4	101.9	79
130	4	3.9	137	138.5	136.37	11	10.2	4	106.9	82
135	4	3.9	142	143.5	141.37	11.2	10.5	4	111.5	84
140	4	3.9	147	148.5	146.37	11.2	10.7	4	116.5	87.5
145	4	3.9	152	153.5	151.37	11.4	10.9	4	121	93
150	4	3.9	158	159.5	157.37	12	11.2	4	124.8	105
155	4	3.9	164	165.5	163.37	12	11.4	4	129.8	107
160	4	3.9	169	170.5	168.37	13	11.6	4	132.7	110
165	4	3.9	174.5	176	173.87	13	11.8	4	137.7	125
170	4	3.9	179.5	181	178.87	13.5	12.2	4	141.6	140
175	4	3.9	184.5	186.2	183.78	13.5	12.7	4	146.6	150
180	4	3.9	189.5	191.2	188.78	14.2	13.2	4	150.2	165
185	4	3.9	194.5	196.2	193.78	14.2	13.7	4	155.2	170
190	4	3.9	199.5	201.2	198.78	14.2	13.8	4	160.2	175
195	4	3.9	204.5	206.2	203.78	14.2	13.8	4	165.2	183
200	4	3.9	209.5	211.2	208.78	14.2	14	4	170.2	195
210	5	4.88	222	223.7	221.28	14.2	14	4	180.2	270
220	5	4.88	232	233.7	231.28	14.2	14	4	190.2	315
230	5	4.88	242	243.7	241.28	14.2	14	4	200.2	330
240	5	4.88	252	254	251.19	14.2	14	4	210.2	345
250	5	4.88	262	264	261.19	14.2	14	4	220.2	360
260	5	4.88	275	277	274.19	16.2	16	5	226	375
270	5	4.88	285	287	284.19	16.2	16	5	236	388
280	5	4.88	295	297	294.19	16.2	16	5	246	400
290	5	4.88	305	307	304.19	16.2	16	5	256	415
300	5	4.88	315	317	314.19	16.2	16	5	266	435