


规格和公差

Specification & Tolerance

直套规格及公差 Sleeve Bushing Specification & Tolerance

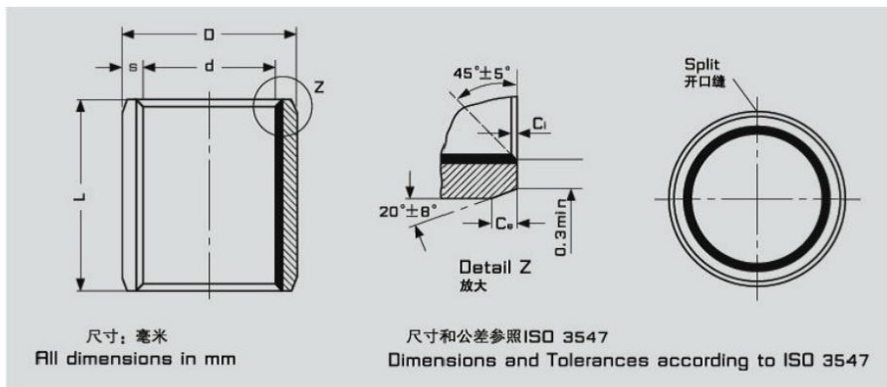

内外倒角尺寸表 Inside & Outside Chamfers

壁厚 Wall thickness S	内倒角 Inside Chamfer C _i	外倒角 Outside Chamfer C _e
0.75	0.25±0.15	0.50±0.30
1.00	0.30±0.20	0.60±0.40
1.50	0.40±0.30	0.60±0.40
2.00	0.40±0.30	1.20±0.40
2.50	0.60±0.40	1.80±0.60

直套型号标注方式 Bushing Symbol

直套型号标注方式 Bushes Symbol	CNB-□	× ×	× ×
直套型号 Bushing Type			
直套内径 Bushing I.D.			
直套高度 Bushing Length			

型号 Part No	内径 Internal Diameter			外径 External Diamenter			高度 Length	壁厚 Wall thickness			
	内径 d	装配轴径 Shaft-Φd _s	装配后内孔尺寸Φd _i	外径 D	装配座孔 Housing-ΦD _h	理论外径公差 O.D.ΦD _t	ID<80L±0.25	S			
							ID>80L±0.25				
CNB-1 0404	4	4.000	4.048	5.5	5.508 5.500	+0.055 +0.025	4	0.750 0.730			
CNB-1 0406		3.992	4.000				6				
CNB-1 0410							10				
CNB-1 0505	5	4.990	5.055	7	7.015 7.000		5	1.005 0.980			
CNB-1 0508		4.978	4.990				8				
CNB-1 0510							10				
CNB-1 0604	6	5.990	6.055	8	8.015 8.000		4				
CNB-1 0606		5.978	5.990				6				
CNB-1 0608							8				
CNB-1 0610							10				
CNB-1 0705	7	6.987	7.055	9	9.015 9.000		5				
CNB-1 0710		6.972	6.990				10				
CNB-1 0806	8	7.987	8.055	10	10.015 10.000		6				
CNB-1 0808		7.972	7.990				8				
CNB-1 0810							10				
CNB-1 0812							12				



型号 Part No	内径 Internal Diameter			外径 External Diamenter			高度 Length	壁厚 Wall thickness
	内径 d	装配轴径 Shaft-Φd _s	装配后内孔尺寸Φd ₁	外径 D	装配座孔 Housing-ΦD _H	理论外径公差 O.D.ΦD _t	ID<80L±0.25	S
							ID>80L±0.25	
CNB-1 1008	10	9.987 9.972	10.058 9.990	12	12.018 12.000		8	1.005 0.980
CNB-1 1010							10	
CNB-1 1012							12	
CNB-1 1015							15	
CNB-1 1020							20	
CNB-1 1208	12	11.984 11.966	12.058 11.990	14	14.018 14.000		8	
CNB-1 1210							10	
CNB-1 1212							12	
CNB-1 1215							15	
CNB-1 1220							20	
CNB-1 1225	13	12.984 12.966	13.058 12.990	15	15.018 15.000		25	
CNB-1 1310							10	
CNB-1 1315							15	
CNB-1 1320							20	
CNB-1 1405	14	13.984 13.966	14.058 13.990	16	16.018 16.000		5	
CNB-1 1410							10	
CNB-1 1412							12	
CNB-1 1415							15	
CNB-1 1420							20	
CNB-1 1425	15	14.984 14.966	15.058 14.990	17	17.018 17.000		25	
CNB-1 1510						10		
CNB-1 1512						12		
CNB-1 1515						15		
CNB-1 1520						20		
CNB-1 1525	16	15.984 15.966	16.058 15.990	18	18.018 18.000	25		
CNB-1 1610						10		
CNB-1 1612						12		
CNB-1 1615						15		
CNB-1 1620						20		
CNB-1 1625	18	17.984 17.966	18.061 17.990	20	20.021 20.000	25		
CNB-1 1810						10		
CNB-1 1815						15		
CNB-1 1820						20		
CNB-1 1825						25		

型号 Part No	内径 Internal Diameter			外径 External Diameter			高度 Length	壁厚 Wall thickness
	内径 d	装配轴径 Shaft- Φd_1	装配后内孔尺寸 Φd_1	外径 D	装配座孔 Housing- ΦD_H	理论外径公差 O.D. ΦD_t	ID<80L±0.25	S
							ID>80L±0.25	
CNB-1 2010	20	19.980 19.959		23			10	1.505 1.475
CNB-1 2015							15	
CNB-1 2020							20	
CNB-1 2025							25	
CNB-1 2030							30	
CNB-1 2215	22	21.980 21.959		25		+0.075 +0.035	15	
CNB-1 2220							20	
CNB-1 2225							25	
CNB-1 2230							30	
CNB-1 2415	24	23.980 23.959		27			15	
CNB-1 2420							20	
CNB-1 2425							25	
CNB-1 2430							30	
CNB-1 2515	25	24.980 24.959		28			15	
CNB-1 2520							20	
CNB-1 2525							25	
CNB-1 2530							30	
CNB-1 2540							40	
CNB-1 2550							50	
CNB-1 2815	28	27.980 27.959		32			15	
CNB-1 2820							20	
CNB-1 2825							25	
CNB-1 2830							30	
CNB-1 3010	30	29.980 29.959		34		+0.085 +0.045	10	2.005 1.970
CNB-1 3015							15	
CNB-1 3020							20	
CNB-1 3025							25	
CNB-1 3030							30	
CNB-1 3040							40	
CNB-1 3220	32	31.975 31.950		36			20	
CNB-1 3225							25	
CNB-1 3230							30	
CNB-1 3235							35	
CNB-1 3240							40	



型号 Part No	内径 Internal Diameter			外径 External Diamenter			高度 Length	壁厚 Wall thickness
	内径 d	装配轴径 Shaft-Φd _s	装配后内孔尺寸Φd _i	外径 D	装配座孔 Housing-ΦD _H	理论外径公差 O.D.ΦD _t	ID<80L±0.25	S
							ID>80L±0.25	
CNB-1 3520	35	34.975 34.950	35.085 34.990	39	39.025 39.000	+0.085 +0.045	10	2.005 1.970
CNB-1 3530							15	
CNB-1 3450							20	
CNB-1 3540							25	
CNB-1 3550							30	
CNB-1 4012	40	39.975 39.950	40.085 39.990	44	44.025 44.000		15	
CNB-1 4020							20	
CNB-1 4025							25	
CNB-1 4030							30	
CNB-1 4040							15	
CNB-1 4050	20							
CNB-1 4520	45	44.975 44.950	45.105 44.950	50	50.025 50.000		25	
CNB-1 4530							30	
CNB-1 4540							15	
CNB-1 4545							20	
CNB-1 4550							25	
CNB-1 5020	50	49.975 49.950	50.110 49.990	55	55.030 55.000		30	
CNB-1 5030							40	
CNB-1 5040							50	
CNB-1 5050							15	
CNB-1 5060							20	
CNB-1 5520	55	54.970 54.940	55.110 54.990	60	60.030 60.000		25	
CNB-1 5525							30	
CNB-1 5530							10	
CNB-1 5540							15	
CNB-1 5550							20	
CNB-1 5555	60	59.970 59.990	60.110 59.990	65	65.030 65.000	25		
CNB-1 5560						30		
CNB-1 6020						40		
CNB-1 6030						20		
CNB-1 6040						25		
CNB-1 6050	30							
CNB-1 6060	35							
CNB-1 6070	40							

型号 Part No	内径 Internal Diameter			外径 External Diamenter			高度 Length	壁厚 Wall thickness
	内径 d	装配轴径 Shaft-Φd _s	装配后内 孔尺寸Φd _i	外径 D	装配座孔 Housing-ΦD _H	理论外径公差 O.D.ΦD _t	ID<80L±0.25	S
							ID>80L±0.25	
CNB-1 6530	65	64.970 64.940	65.110 64.990	65	70.030 70.000	+0.100 +0.055	30	2.505 2.460
CNB-1 6550							50	
CNB-1 6570							70	
CNB-1 7040	70	69.970 69.940	70.110 69.990	70	75.030 75.000		40	
CNB-1 7050							50	
CNB-1 7070							70	
CNB-1 7560	75	74.970 74.940	75.110 74.990	75	80.030 80.000		60	
CNB-1 7580							80	
CNB-1 8060	80	80.000 79.946	80.155 80.020	80	85.035 85.000		60	
CNB-1 8080						80		
CNB-1 80100						100		
CNB-1 8560	85	85.000 84.946	85.155 85.020	85	90.035 90.000	60		
CNB-1 8580						80		
CNB-1 85100						100		
CNB-1 9060	90	90.000 89.946	90.155 90.020	90	95.035 95.000	60		
CNB-1 9080						80		
CNB-1 90100						100		
CNB-1 9560	95	95.000 94.946	95.155 95.020	95	100.035 100.000	60		
CNB-1 9580						80		
CNB-1 95100						100		
CNB-1 10050	100	100.000 99.946	100.155 100.020	100	105.035 105.000	50		
CNB-1 10060						60		
CNB-1 10080						80		
CNB-1 100100						100		
CNB-1 10560	105	105.000 104.946	105.155 105.020	105	110.035 110.000	60		
CNB-1 10580						80		
CNB-1 105100						100		
CNB-1 11060	110	110.000 109.946	110.155 110.020	110	115.035 115.000	60		
CNB-1 11080						80		
CNB-1 110100						100		
CNB-1 11560	115	115.000 114.946	115.155 115.020	115	120.035 120.000	60		
CNB-1 11570						70		
CNB-1 12050						50		
CNB-1 12060	120	120.000 119.946	120.210 120.070	120	125.040 125.000	60	2.465 2.415	
CNB-1 120100						100		
CNB-1 12560						60		
CNB-1 12580	125	125.000 124.937	125.210 125.070	125	130.040 130.000	80		
CNB-1 125100						100		
CNB-1 13060						60		
CNB-1 13080	130	130.000 129.937	130.210 130.070	130	135.040 135.000	80		
CNB-1 130100						100		



型号 Part No	内径 Internal Diameter			外径 External Diameter			高度 Length	壁厚 Wall thickness
	内径 d	装配轴径 Shaft-Φd _s	装配后内孔尺寸Φd _i	外径 D	装配座孔 Housing-ΦD _H	理论外径公差 O.D.ΦD _t	ID<80L±0.25	S
							ID>80L±0.25	
CNB-1 13560	135	135.000 134.937	135.210 135.070	140	140.040 140.000	+0.170 +0.100	60	2.465 2.415
CNB-1 13580							80	
CNB-1 135100							100	
CNB-1 14060	140	140.000 139.937	140.210 140.070	145	145.040 145.000		60	
CNB-1 14080							80	
CNB-1 140100							100	
CNB-1 15060	150	150.000 149.937	150.210 150.070	155	155.040 150.000		60	
CNB-1 15080							80	
CNB-1 150100							100	
CNB-1 16080	160	160.000 159.937	160.210 160.070	165	165.040 165.000		80	
CNB-1 160100							100	
CNB-1 18080	180	180.000 159.937	180.216 180.070	185	185.046 185.000	80		
CNB-1 180100						100		
CNB-1 20080	200	200.000 199.928	200.216 200.070	205	205.046 205.000	80		
CNB-1 200100						100		
CNB-1 21080	210	210.000 209.928	210.216 220.070	215	215.046 205.000	80		
CNB-1 210100						100		
CNB-1 22080	220	220.000 219.928	220.216 220.070	225	225.046 225.000	80		
CNB-1 220100						100		
CNB-1 25080	250	250.000 249.928	250.222 250.070	255	255.052 255.000	80		
CNB-1 250100						100		
CNB-1 28080	280	280.000 279.948	280.222 280.070	285	285.052 285.000	80		
CNB-1 280100						100		
CNB-1 30080	300	300.000 299.919	300.000 300.070	305	305.052 305.000	80		
CNB-1 300100						100		



Gear pump



Plunger pump



Vane pump



Cylinder